





TECHNICAL DATA SHEET

Review 002, 04/2016 Page 1 of 2



PRODUCT

BLU STYRENE-FREE RESIN (C7141)

CHARACTERISTICS

BLU STYRENE-FREE RESIN is a transparent polyester resin based product, for metal, plastic and fiberglass. Suitable to glue and to repair damaged or incomplete parts, it can be used, for the application, with fiberglass to obtain exceptional mechanical characteristics.

BLU STYRENE-FREE RESIN is supplied with the hardener paste.

TECHNICAL DATA		
Specific weight	$1160 \pm 20 \text{ g/l}$	(MI 001)
Solid in weight	100 %	(MI 006)
Viscosity	$1000 \pm 100 \text{ cP}$	(MI 002; 25°C)
Colour	mahogany	

STORAGE

Keep the container well closed and stored in a cool (temperature below 25°C) and ventilated environment for a maximum period of 12 months from the date of production marked on the tin. Avoid direct sun exposure.

SAFETY RULES

Make sure the room is well-ventilated during the application and drying processes. Appropriate PPE must be used when applying the product. Read the safety data sheet carefully before using the product.

FEATURES Mixing ratio volume/ weight Hardener paste (DBP) 100g: 1-3 g Gel time 25 - 30 min (MI 003; 25 °C)







TECHNICAL DATA SHEET

Review 002, 04/2016


Page 2 of 2



APPLICATION

- Make sure that the surface to be treated is clean from grease and salt;
- Add to the resin its hardener, in rate of 1-3% and mix well the two components;
- Apply with brush; the product can be worked after a complete hardening;
- Remember do not apply on wet surfaces.

ADDITIONAL INFORMATION

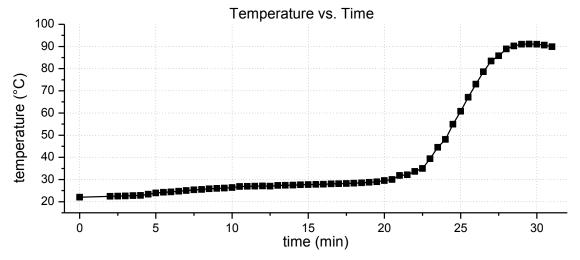

Catalysis (MI 003) has been performed with 2% Benzoyl Peroxide Paste